

Gate-controllable spin-battery

Wen Long

¹*Department of Physics, Capital Normal University, Beijing 100037, China*

Qing-feng Sun and Hong Guo

*Center for the Physics of Materials and Department of Physics, McGill University, Montreal, PQ, Canada H3A 2T8.
International Center for Quantum Structures, Institute of Physics, Chinese Academy of Sciences, Beijing 100080, China*

Jian Wang

Department of Physics, The University of Hong Kong, Pokfulam Road, Hong Kong, China

We propose a gate-controllable spin-battery for spin current. The spin-battery consists of a lateral double quantum dot under a uniform magnetic field. A finite DC spin-current is driven out of the device by controlling a set of gate voltages. Spin-current can also be delivered in the absence of charge-current. The proposed device should be realizable using present technology at low temperature.

85.35.-p, 72.25.Pn, 73.40.Gk

To be able to generate and control spin-current is of great importance for spintronics¹. Traditionally, spin injection from a ferromagnetic material to a normal metal or semiconductor material has been used to obtain spin polarized charge-current. Spin injection into non-Fermi liquid² as well as by circularly polarized light³ have also been investigated. More recently, several theoretical proposals for spin-battery were reported for the generation of pure spin-current without charge-current.⁴⁻⁶ The idea is that when spin-up electrons move to one direction while an equal number of spin-down electrons move to the opposite direction, the net charge-current $I_e = e(I_\uparrow + I_\downarrow)$ vanishes and a finite spin-current $I_s = \frac{\hbar}{2}(I_\uparrow - I_\downarrow)$ emerges. Here $I_\uparrow$ ($I_\downarrow$) is the spin-up (spin-down) electron current. Although conceptually interesting, existing spin-battery proposals all involve time dependent external fields⁴⁻⁶ which make practical realization somewhat complicated. It is the purpose of this paper to propose and investigate a novel spin-battery design which is gate controllable involving no time varying fields.

The gate controllable spin-battery is schematically shown in Fig.(1). It consists of a lateral double quantum-dot fabricated in two-dimensional electron gas (2DEG) with split gate technology. The two QDs are coupled to three leads: lead-1 and 3 couple to one QD each, lead-2 couples to both. The two QDs are separated by a high potential barrier so that tunnel coupling between them can be neglected. To distinguish spin of the electrons, a magnetic field B is applied to the QDs to induce a Zeeman splitting. Two gate voltages $V_{g,\alpha}$ control energy levels of the α -th QD, where $\alpha = upper, lower$ (u, l), indicating the upper and lower QD of Fig.(1). Finally, the

terminal voltages for the three leads are set such that $V_1 > V_2 > V_3$ (Fig.2), they provide energy source for the spin-battery.

Before presenting results, we first discuss why the system of Fig.(1) can deliver a spin-current. Due to field B , a spin degenerate level ϵ_α of the α -QD is split into spin-up/down levels $\epsilon_{\alpha\uparrow}/\epsilon_{\alpha\downarrow}$. Let's assume $\epsilon_{\alpha\uparrow} < \epsilon_{\alpha\downarrow}$. By adjusting gate voltages $V_{g,\alpha}$, we shift these levels. In particular, we set $V_{g,lower}$ such that electron occupation number in the lower-QD is changing between 0 and 1 (even to odd), with the level $\epsilon_{lower,\uparrow}$ locating between μ_1 and μ_2 , where $\mu_i = eV_i$ is the chemical potential of lead i . Similarly, we set $V_{g,upper}$ such that the upper-QD has an electron occupying state $\epsilon_{upper,\uparrow}$, while the other state $\epsilon_{upper,\downarrow}$ is pushed to higher energy $\epsilon_{upper,\downarrow} + U$ due to Coulomb interaction U . This way, the electron occupation number in the upper-QD is changing between 1 and 2 (odd to even), and the level $\epsilon_{upper,\downarrow} + U$ locates between μ_2 and μ_3 . The energy level diagram shown in Fig.(2) is now established. From Fig.(2), it is clear that a spin-up electron in lead-1 can tunnel into the lower-QD and further to lead-2. Similarly, a spin-down electron in lead-2 can tunnel into the upper-QD and flows to lead-3. Therefore, in lead-2 spin-up electrons flow in and spin-down electrons flow out: they move in opposite directions so that a net spin-current is generated. Hence, by adjusting gate potentials the device of Fig.(1) generates a spin-current in the region labeled by (A,B).

We now present detailed analysis. The lateral double-QD device is described by the following Hamiltonian:

$$H = \sum_{\alpha\sigma} (\epsilon_\alpha - \sigma g \mu B_\alpha / 2) d_{\alpha\sigma}^\dagger d_{\alpha\sigma} + \sum_{\alpha} U_{\alpha} d_{\alpha\uparrow}^\dagger d_{\alpha\uparrow} d_{\alpha\downarrow}^\dagger d_{\alpha\downarrow} + \sum_{nk\sigma} \epsilon_{nk} a_{nk\sigma}^\dagger a_{nk\sigma} + \sum_{nk\sigma\alpha} \left(t_{n,\alpha} a_{nk\sigma}^\dagger d_{\alpha\sigma} + H.c. \right) \quad (1)$$

where $a_{nk\sigma}^\dagger$ ($a_{nk\sigma}$) and $d_{\alpha\sigma}^\dagger$ ($d_{\alpha\sigma}$) are creation (annihilation) operators in lead- n and the α -QD, respectively. Each QD has a single particle energy level ϵ_α with spin index σ , and the intradot Coulomb interaction is U_α . To account for magnetic field B , ϵ_α has a term $-\sigma g \mu B_\alpha / 2$ where g is a constant. We permit $U_{upper} \neq U_{lower}$ and $B_{upper} \neq B_{lower}$, but these details do not affect our general results. The last term in the Hamiltonian describes the coupling between the QDs and the leads, and $t_{n,\alpha}$

is the coupling strength. We set $t_{1,upper} = t_{3,lower} = 0$, meaning there is no coupling between the upper-QD and lead-1 and between the lower-QD and lead-3.

We solve electron current $I_{n,\sigma}$ using standard Keldysh nonequilibrium Green's function method (NEGF)⁷ ($\hbar = 1$): $I_{n\sigma} = -2eIm \sum \int \frac{d\epsilon}{2\pi} \Gamma_{n\alpha} \{f_n(\epsilon)G_{\alpha\sigma}^r(\epsilon) + \frac{1}{2}G_{\alpha\sigma}^<(\epsilon)\}$ where $\Gamma_{n,\alpha} \equiv 2\pi \sum_k |t_{n,\alpha}|^2 \delta(\epsilon - \epsilon_{nk})$ is the linewidth function. $f_n(\epsilon)$ is the Fermi distribution function in lead- n . The NEGF $G_{\alpha\sigma}^{r,<}(\epsilon)$ is the Fourier transform of $G_{\alpha\sigma}^{r,<}(t)$: with $G_{\alpha\sigma}^r(t) \equiv -i\theta(t) \langle \{d_{\alpha\sigma}(t), d_{\alpha\sigma}^\dagger(0)\} \rangle$ and $G_{\alpha\sigma}^<(t) \equiv i \langle d_{\alpha\sigma}^\dagger(0)d_{\alpha\sigma}(t) \rangle$.

We solve the retarded Green's function $G_{\alpha\sigma}^r$ in by the standard equation of motion technique where indirect tunneling processes such as upper-QD $\rightarrow$ lead-2 $\rightarrow$ lower-QD are neglected, this is reasonable because the long middle barrier between the QDs helps to block such events to a large extent. We obtain⁶:

$$G_{\alpha\sigma}^r(\epsilon) = \frac{\epsilon_{\alpha\sigma}^- + U_\alpha n_{\alpha\bar{\sigma}}}{(\epsilon - \epsilon_{\alpha\sigma})\epsilon_{\alpha\sigma}^- + \frac{i}{2}\Gamma_\alpha(\epsilon_{\alpha\sigma}^- + U_\alpha n_{\alpha\bar{\sigma}})}, \quad (2)$$

where $\epsilon_{\alpha\sigma}^- \equiv \epsilon - \epsilon_{\alpha\sigma} - U_\alpha$, $\epsilon_{\alpha\sigma} \equiv \epsilon_\alpha - \sigma g\mu B_\alpha/2$, $\Gamma_\alpha = \sum_n \Gamma_{n\alpha}$, and $n_{\alpha\bar{\sigma}}$ is the intradot occupation number of state $\bar{\sigma}$ in the α -QD. $n_{\alpha\bar{\sigma}}$ needs to be calculated self-consistently from the self-consistent equation $n_{\alpha\bar{\sigma}} = -i \int \frac{d\epsilon}{2\pi} G_{\alpha\bar{\sigma}}^<(\epsilon)$. As usual, $G_{n\sigma}^r(\epsilon)$ has two resonances: one at energy $\epsilon_{\alpha\sigma}$ for which the associated state $\epsilon_{\alpha\bar{\sigma}}$ is empty; the other is at $\epsilon_{\alpha\sigma} + U_\alpha$ for which the associated state $\epsilon_{\alpha\bar{\sigma}}$ is occupied.

Following the approach of Ref. 8, we obtain $\int d\epsilon G_{\alpha\sigma}^<(\epsilon)$ which is needed in computing current and occupation number:

$$\int \frac{d\epsilon}{2\pi} G_{\alpha\sigma}^<(\epsilon) = - \int \frac{d\epsilon}{2\pi} \sum_n \frac{\Gamma_{n\alpha} f_n}{\Gamma_\alpha} (G_{\alpha\sigma}^r(\epsilon) - G_{\alpha\sigma}^a(\epsilon)).$$

This completes the analytical derivation.

We set bias voltages $\mu_1 = 0.05$, $\mu_2 = 0$, $\mu_3 = -0.05$ so that $\mu_1 > \mu_2 > \mu_3$. We set gate voltages $V_{g,\alpha}$ such that at zero magnetic field, $\epsilon_{lower} = \mu_1$ and $\epsilon_{upper} + U_{upper} = \mu_3$. With this condition there is one electron in the upper-QD. Fig.(3a,b) shows electron current $I_{n\uparrow}$ and $I_{n\downarrow}$; charge-current in lead-2 $I_{2e} = e(I_{2\uparrow} + I_{2\downarrow})$; and spin-current in lead-2 $I_{2s} = \frac{\hbar}{2}(I_{2\uparrow} - I_{2\downarrow})$, versus a uniform field strength B . At zero B , electron current is non-polarized so that $I_{n\uparrow} = I_{n\downarrow}$, and both I_{2e} and I_{2s} vanish. When B increases from zero, the intradot level ϵ_α is split. Then levels $\epsilon_{lower,\uparrow}$ and $\epsilon_{upper,\downarrow} + U_{upper}$ are moved into the bias "window" between $\mu_1(\mu_3)$ and μ_2 , while levels $\epsilon_{lower,\downarrow}$ and $\epsilon_{upper,\uparrow} + U_{upper}$ are moved out of the window, see Fig.(2). In this situation the electron current in lead-1 and lead-3 are polarized with $I_{\alpha\uparrow} \neq I_{\alpha\downarrow}$. Moreover, we have $|I_{1\uparrow}| > |I_{1\downarrow}|$ and $|I_{3\uparrow}| < |I_{3\downarrow}|$. In the following, we focus on current in lead-2, shown in Fig.(3b). In lead-2 the value of electron current $I_{2\uparrow}$ equals to the value of $I_{2\downarrow}$, but their flow direction is exactly opposite to each other hence we have $I_{2\uparrow} = -I_{2\downarrow}$. We therefore obtain zero charge-current $I_{2e} = 0$; and a net spin-current I_{2s}

emerges. When parameter $g\mu B/2 \approx 0.03$, the intradot levels $\epsilon_{lower,\uparrow}$ and $\epsilon_{upper,\downarrow} + U_{upper}$ are in the middle of the bias window, leading to the maximum spin-current. If field B increases further, the spin-current slightly decreases.

The device discussed here should be realizable using present technology because lateral double-QD structures have already been fabricated⁹. Our analysis also show that the device does not have a very strict parameter requirement. (i) The sizes of the two QDs need not be the same; the intradot Coulomb interaction parameters U_{upper}, U_{lower} need not be the same. (ii) The field B may or may not be uniform, it may also point to any direction. For different directions of $\mathbf{B}$, a spin-current is still induced but the spin polarization would depends on the field direction. (iii) The four coupling strengths ($\Gamma_{1,lower}, \Gamma_{2,lower}, \Gamma_{3,upper}, \Gamma_{2,upper}$) between the QDs and the leads can be controlled by split gate voltages ($V_{sp1}, V_{sp2}, V_{sp3}, V_{sp4}$) as shown in Fig.(1), and they do not need to be the same. In fact, one may fix any three of the four and only regulate the last one to obtain a pure spin-current with zero charge-current. For example, fixing $\Gamma_{1,lower} \neq \Gamma_{2,lower} \neq \Gamma_{2,upper}$, the spin-current I_{2s} and charge-current I_{2e} versus $\Gamma_{3,upper}$ is shown in Fig.(3c). At a special value of $\Gamma_{3,upper}$ given by relation $\Gamma_{3,upper}\Gamma_{2,upper}/\Gamma_{upper} = \Gamma_{1,lower}\Gamma_{2,lower}/\Gamma_{lower}$, I_{2e} vanishes and only I_{2s} exists. (iv) So far we have set $\epsilon_{lower} = \mu_1$ and $\epsilon_{upper} + U_{upper} = \mu_3$, but these conditions can be relaxed. For example, if $\epsilon_{upper} + U_{upper} = -0.06$, somewhat different from μ_3 , by regulating the lower-QD level ϵ_{lower} using gate voltage $V_{g,lower}$, we can easily find the operation point for large I_{2s} with zero I_{2e} , as shown in Fig.(3d). (v) As for the parameter values, in Fig.(3) we have used $k_B T = 0.01$. Assuming this is equivalent to 100mK,¹⁰ other parameter values used to generate Fig.(3) can be deduced. We find: $V_1 = \mu_1/e \approx 43\mu V$, $V_2 = 0$, $V_3 \approx -43\mu V$, $U_\alpha \approx 1meV$, and $B \approx 0.8/g$ tesla for $g\mu B/2 = 0.03$.¹¹ These parameters are in the standard range of QD devices.¹²

Finally, we discuss in what sense the proposed device behaves as a spin-battery with two poles. Note that the region indicated by the dotted box in Fig.(1) is reserved for spintronic devices: any application of spin-current should be done in this region. The lateral-QD plus the external circuit constitute the spin-battery: the two poles of the spin-battery are points "A" and "B" as shown in Fig.(1). If there exists direct connection between A and B, a spin current is driven through by the spin-battery. On the other hand, if there is no direct connection, a spin-motive force will be established between A and B. Importantly, even if there are not spin flip mechanisms in whole device, the spin-battery can still work, which is different from the one-pole systems.^{4,5} Finally, the distance between points A and B can be as large as the spin coherence length which can reach many μm at low temperatures.^{13,14} Such as large distance should allow useful applications of the flowing spin-current.

In summary, we have shown that gate-controllable

spin-battery for spin-current is possible. Such a device should be fabricable using present technology. We believe the present design to be superior as no time-dependent field is involved. In the present work, we did not discuss detection of pure spin-current without charge-current, but such discussions already exist in literature^{15,13,16} and we refer interested readers to them.

Acknowledgments: We gratefully acknowledge financial support from NSERC of Canada, FCAR of Quebec (Q.S., H.G), and a RGC grant from the SAR Government of Hong Kong under grant number HKU 7091/01P (J.W.).

FIG. 2. Schematic plot of energy level position and the tunneling process during spin-battery operation.

FIG. 3. (a) and (b): for electron currents $I_{n\uparrow}$ and $I_{n\downarrow}$, charge-current I_{2e} (unit e), and spin-current I_{2s} (unit $\frac{\hbar}{2}$), versus magnetic field parameter $g\mu B/2$. Other parameters are $\Gamma_{1,lower} = \Gamma_{2,lower} = \Gamma_{2,upper} = \Gamma_{3,upper} = 0.005$, $k_B T = 0.01$, $U_{lower} = 1.0$, $U_{upper} = 0.9$, $\epsilon_{lower} = \mu_1$, and $\epsilon_{upper} + U_{upper} = \mu_3$. (c): I_{2e} and I_{2s} versus $\Gamma_{3,upper}$ with $g\mu B/2 = 0.03$. Other parameters are: $\Gamma_{1,lower} = 0.004$, $\Gamma_{2,lower} = 0.005$, and $\Gamma_{2,upper} = 0.006$. (d): I_{2e} and I_{2s} versus ϵ_{lower} with $g\mu B/2 = 0.03$. Here $\epsilon_{upper} + U_{upper} = -0.06$ which is slightly different from $\mu_3 = -0.05$. Other parameters in (c) and (d) are the same as those in (a) and (b).

-
- ¹ S.A. Wolf, D.D. Awschalom, R.A. Buhrman, J.M. Daughton, S.V. Molnar, M.L. Roukes, A.Y. Chtchelkanova, D.M. Treger, Science **294**, 1488 (2001); G.A. Prinz, Science **282**, 1660 (1998).
- ² Q. Si, Phys. Rev. Lett. **81**, 3191 (1998).
- ³ I. Zutic, J. Fabian, and S.D. Sarma, Appl. Phys. Lett. **79**, 1558 (2001); *ibid* **82**, 221 (2003).
- ⁴ A. Brataas, Y. Tserkovnyak, G.E.W. Bauer, and B. Halperin, Phys. Rev. B **66**, 060404 (2002).
- ⁵ B. Wang, J. Wang, and H. Guo, cond-mat/0208475 (2002); to appear in Phys. Rev. B (April 1 issue, 2003).
- ⁶ Q.-f. Sun, H. Guo, and J. Wang, cond-mat/0212293 (2002).
- ⁷ Y. Meir and N.S. Wingreen, Phys. Rev. Lett. **68**, 2512 (1992).
- ⁸ Q.-f. Sun and H. Guo, Phys. Rev. B **66**, 155308 (2002).
- ⁹ M. Ciorga, A. S. Sachrajda, P. Hawrylak, C. Gould, P. Zawadzki, S. Jullian, Y. Feng, and Z. Wasilewski, Phys. Rev. B **61**, R16315 (2000).
- ¹⁰ If tempearture is too high, *e.g.* $k_B T > 5g\mu B$, spin-current will be deminished due to thermal fluctuations.
- ¹¹ For typical GaAs/AlGaAs 2DEG, $g \sim 0.45$ so that $B \approx 2$ tesla.
- ¹² In our model Homiltonian, we consider only one level for each QD. This is reasonable if the level spacing Δ is larger than the bias $|V_{1/3} - V_2|$. This should be realizable in present technology. For example, for a $0.2\mu m \times 0.2\mu m$ QD, its Δ is about $\pi\hbar/(m^*area) \approx 90\mu V > |V_{1/3} - V_2| \approx 43\mu V$.
- ¹³ S. Zhang, J. Appl. Phys. **89**, 7564 (2001).
- ¹⁴ M. Johnson and R.H. Silsbee, Phys. Rev. Lett. **55**, 1790 (1985); Phys. Rev. B **37**, 5312 (1988).
- ¹⁵ B. Heinrich, G. Woltersdorf, R. Urban and E. Simanek, to appear in J. Magn. Magn. Mater. (2003).
- ¹⁶ J.E. Hirsh, Phys. Rev. Lett. **83**, 1834 (1999).

FIG. 1. Schematic diagram for the lateral quantum-dot. The lightly shaded region represents two-dimensional electron gas, the darker regions are the metal gates (including split gates V_{spn} , V_p , and gate voltage $V_{g,\alpha}$). The dotted box represents the region in which a pure spin-current flows through.

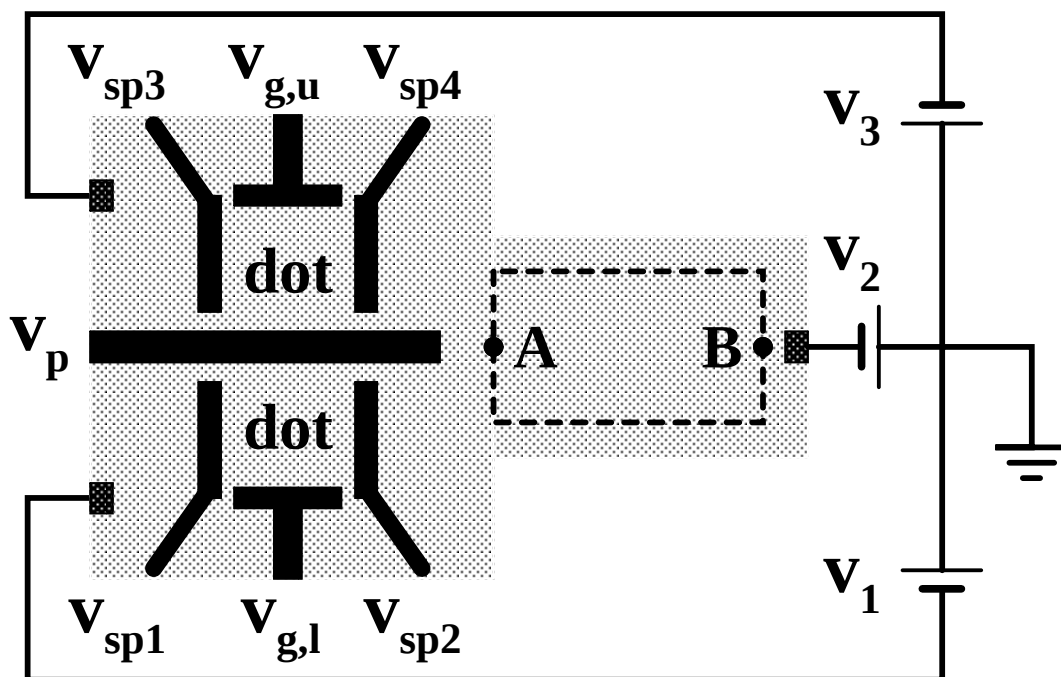


Fig.1

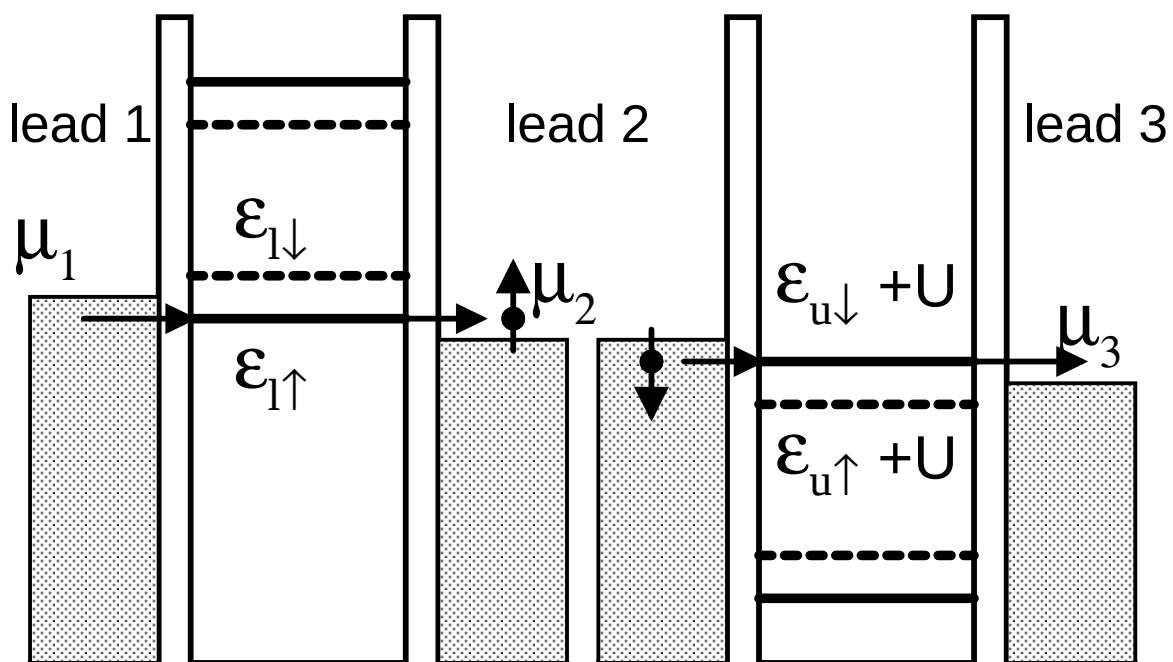


Fig.2

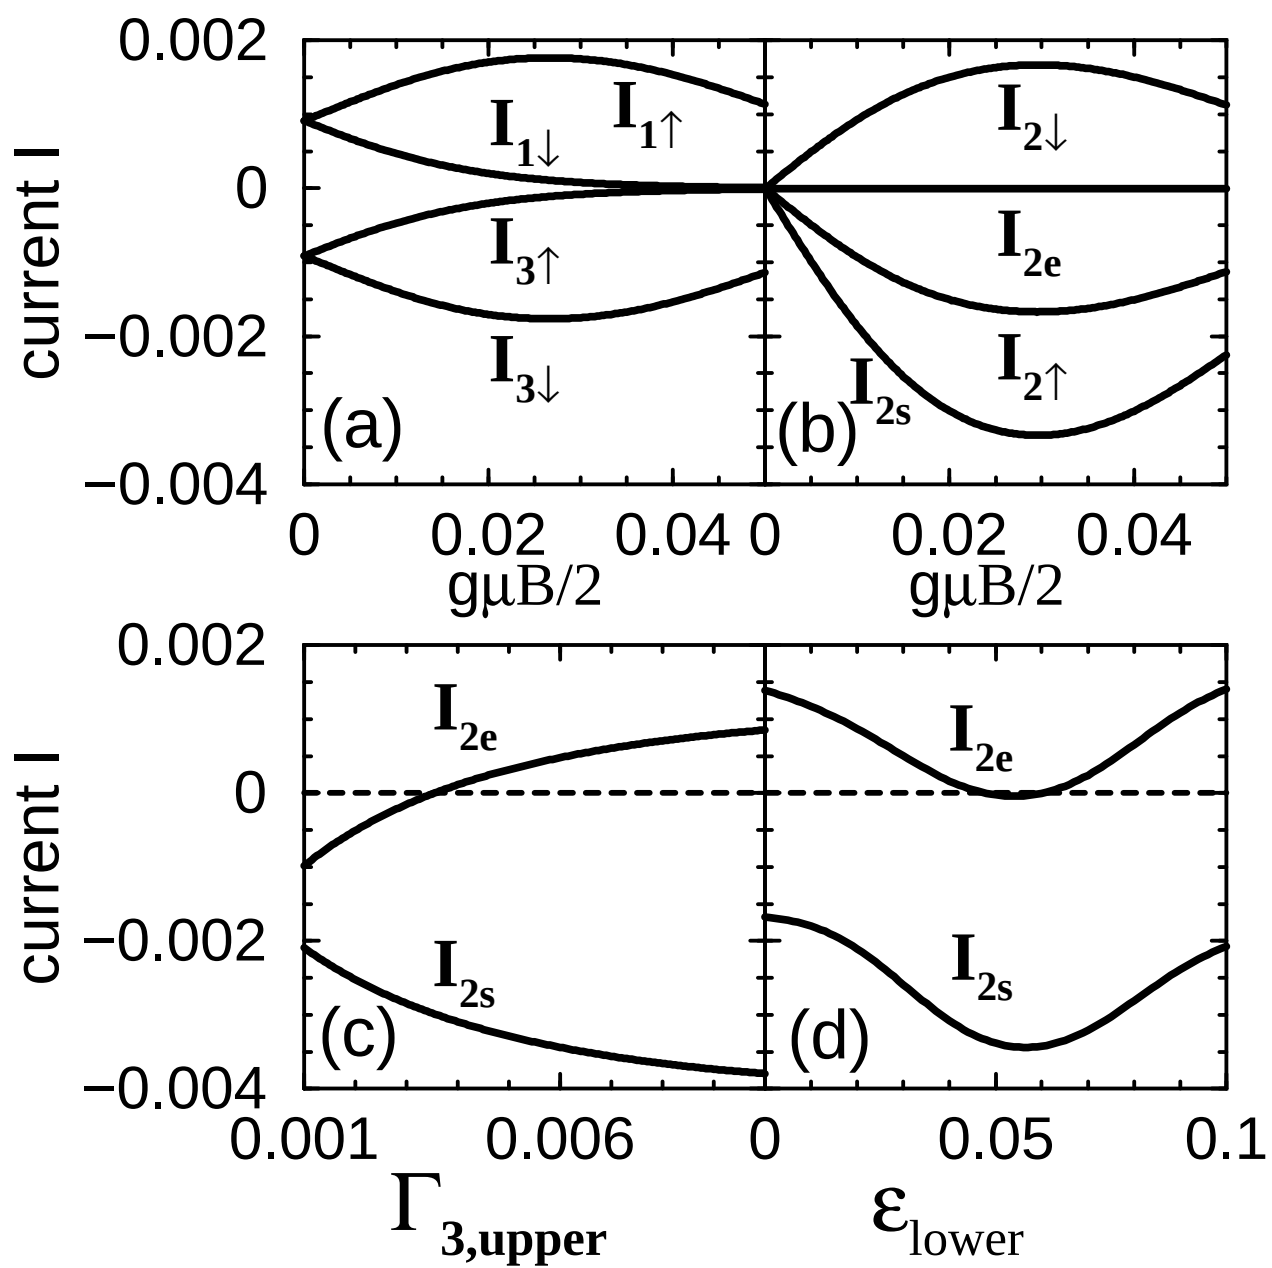


Fig.3